

LAND PREPARATION



DISC PLOW



DISC HARROW



ROTARY TILLER




ROTARY HARROW



BED FORMER

PLANTING & SEEDING

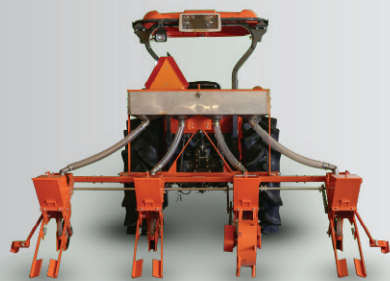

CORN SEEDER



CASSAVA PLANTER



SUGARCANE PLANTER

LOADING & LAND MOVING



FRONT LOADER



FRONT DOZER



SUGARCANE GRABBER



ROTARY SLASHER

FIELD MAINTENANCE

TRACTOR IMPLEMENTS

UNLOCK YOUR TRACTOR'S POTENTIAL



Corn Seeder



Rotary Harrow



Rotary Tiller

Kubota

KUBOTA Philippines, Inc.
232 Quirino Highway, Baesa, Quezon City, Metro Manila
TEL.: +632 8422-3500 to 05



kubota.com.ph

Rotary Tiller

KRX71PH | FL1021C | KRX166
KRX176 | KRX194 | RX220GA
RM220



An implement used to convert hard layers of the soil into perfect seedbed by mixing it until it is fine enough for planting.

Compatible Tractors:

- B2140S (KRX71PH)
- B2440S (FL1021C)
- L3228, L4028 (KRX166)
- L4028 (KRX176)
- L5228 (KRX194)
- MU5702 (RX220GA)
- M7040 (RM220)

Specifications:

Model		KRX71PH	FL1021C	KRX166	KRX176	KRX194	RX220GA	RM220
3-Point Link		Standard 3-point linkage (Category 1)						Standard 3-point linkage (Category 2)
Drive		Side Drive (Chain)						
Dimension	Length	905	950	930	950	893	904	
	Width	900	1190	1816	1928	2141	2305	
	Height	928	925	1030	1020	1071	1176	1191
Weight (including universal joint)		160	195	296	320	429	440	430
Width of Tilling		716	1016	1558	1663	1863	2105	2120
Number of Blades		8 each for right and left		16 each for right and left		18 each for right and left		33 each for right and left
Revolution of Blade Shaft		184 / PTO 540 324 / PTO 980	167 / PTO 540	221 / PTO 540 307 / PTO 750	231 / PTO 540 321 / PTO 750	232 / PTO 540		
Farming Applications		Sugar cane, Cassava, Vegetable		Rice, Corn, Vegetable		Rice, Corn		

Rotary Harrow

RH241



Revolutionize rice farming with this wet-field tillage implement—levels field, incorporates farm weeds residue, and prepares field in just 1–2 passes. No hand tractor needed.

Compatible Tractors:

- L3228, L4028 and L5228

Specifications:

Model		RH241
Working Width	mm	2400
Leveling Width		3200
Harrow Depth		80-100
Lifting Height		490
Shaft, Blade Speed [PTO 540 rpm]	rpm	302
Weight (U-joint excluded)	kg	400
Farming Applications	 Rice	

Bed Former

BFK612 | BFK615



Save time and reduce costs effortlessly with this implement designed for vegetable growers, featuring adjustable widths and effortless installation with rotary tillers KRX176/ KRX194 models, ensuring quality plots and streamlining the planting process.

Compatible Tractors:

- L4028 (KRX176 + BFK612)
- L5228 (KRX194 + BFK615)

Specifications:

Model		BFK612	BFK615
Suitable Rotary Tiller		KRX 176	KRX 194
Dimension	Length	1908	2130
	Width	482	
	Height	835	853
Available Bed Size Configurations (width)		600, 800 1000, 1200	600, 800 1000, 1200 1500
Weight		110	116
Farming Applications		Vegetables	

Rotary Slasher

SX135 | SX145



A heavy duty implement designed for slashing wild farm grass, weeds, anchored straw and thick lawn bushes.

Compatible Tractors:

- L3228 (SX135)
- L4028 (SX135)
- L5228 (SX145)

Specifications:

Model			SX135	SX145
Dimension	Length	mm	1475	1555
	Width		1365	1445
	Height		895	
Weight		kg	200	310
Gear Case Driving System			Spiral Bevel Gear	
Gear Ratio			1:1.7	
Blade Rotation Speed		rpm	900	
PTO Rotation Speed			540	
Farming Application	 Field Maintenance			

Sugarcane Planter

SP420 | SP920



An implement with a unique metering mechanism for planting sugarcane stem directly into the field.

Compatible Tractors:
L5228 (SP420)
M9540 and M108S (SP920)

Specifications:

Model		SP420	SP920
Sugarcane Capacity		450	850
Fertilizer Tank Capacity		50	
Dimension	Length	2020	2090
	Width	1520	1874
	Height	2130	2245
Body Weight		500	933
Farming Applications	Sugarcane		

Sugarcane Grabber

SGB470



An implement specifically designed for the efficient and safe handling of sugarcane in both plantations and sugar mills.

Compatible Tractors:
L5228 (SGB470)

Specifications:

Model			SGB470
Weight			1080
Grabbing	Weight	kg	250
	Width	mm	1428
	Height	mm	3200
Farming Applications		Sugarcane	

Disc Plow

DP224E-HP2 DP224F-HP2 DP263J | DP264L



This implement is designed to work in all types of soil for primary tillage operations such as soil breaking, raising, turning and mixing.

Compatible Tractors:
L4028 (DP224E-HP2) M7040 (DP263J)
L5228 (DP224F-HP2) M9540 (DP264L)
MU5702 (DP263J)

Specifications:

Model		DP224E	DP224F	DP263J	DP264L
Disc Size (Diameter)		22		26	
Number of Discs		4		3	4
Working Depth		150-200		250	300
Weight		295	315	487	590
Dimension	Length	2302	2302	2340	2744
	Width	1283	1320	1243	1366
	Height	1049	1034	1273	1333
Farming Applications		Sugarcane Cassava Vegetable Rice Corn			

Disc Harrow

DH225E | DH226E DH245-6F | DH266JW



This implement is used for secondary tillage operations to achieve optimum soil condition before planting.

Compatible Tractors:
L4028 (DH225E/DH226E)
L5228 (DH245-6F)
MU5702 (DH266JW)
M7040 (DH266JW)

Specifications:

Model		DH225E	DH226E	DH245-6F	DH266JW
Disc Size (Diameter)		22		24	26
Number of Discs		5	6	5-6	6
Weight		305	320	398	530
Dimension	Length	1970		1335	2369
	Width	1460		2189	1804
	Height	978		1058	1331
Farming Applications		Sugarcane Cassava Vegetable Rice Corn			

Front Dozer

FD165E | FD187F

FD203G | FD206J



A versatile implement commonly used for moving, spreading, and leveling soil in both agricultural and industrial applications.

Compatible Tractors:

L4028 (FD165E) MU5702 (FD203G)
L5228 (FD187F) M7040 (FD206J)

Specifications:

Model		FD165E	FD187F	FD203G	FD206J
Weight	kg	333	441	537	750
Blade Width	mm	1615	1830	2034	2034
Blade Height		490	520	530	540
Height from floor to blade (when at max. lift height)		250	370	385	370
Blade Position Control		Hydraulic (Control Valve Controller on the Tractor)			

Front Loader

FL4028 | FL5228



An implement built for the task of moving solid and bulky agricultural materials. It can also be used to dig and grade soil.

Compatible Tractors:

L4028 (FL4028)
L5228 (FL5228)

Specifications:

Model		FL4028	FL5228
Type of Bucket		Agriculture	
Lifting capacity (bucket pivot pin max. height)	mm	3220	3275
Width		1500	1800
Max. Allowable Load	kg	400	450
Raising time	sec.	5.9	4.7
Lowering time		3.7	3.6
Bucket dumping time		2.6	2.2

Corn Seeder

MS360



A reliable and precise four-row corn seeder with fertilizer applicator for streamlining corn planting operations.

Compatible Tractors: L4028 and L5228 (MS360)

Specifications:

Model			MS360
Dimension	Weight	mm	3070
	Length		1370
	Height		1200
Transmission	Drive System	Ground Wheel	
	Sprocket ratio of seeding	1:01	
	Sprocket ratio of fertilizing	1:01:06	
3P Hitch			Standard 3P Hitch
Seeding Unit	Number of row	4 row	
	Planting row pitch	mm	500 - 700
	Seeding type	Disc Type	
	Hopper Capacity	20kg (5kg x 4)	
	Monitoring window on seed hopper	Equipped (at all hopper)	
Fertilizing Unit	Hopper Capacity	50kg (50kg x 1 unit)	
	Hopper Material	Stainless steel	
	Monitoring window on fertilizer hopper	Equipped (at front RH side)	
Mark to support connecting line easily			Equipped
Weight		kg	260
Farming Applications			Corn

Cassava Planter

CP200F



Achieve precision and efficiency in cassava planting with this lightweight implement, perfectly balanced with MU5702, M7040 and M9540 tractor models; capable of planting two rows in one pass, equipped with a fertilizer applicator and bed former for optimal results.

Compatible Tractors:

MU5702, M7040 and M9540

Specifications:

Model				CP200F
Work Quality	Planting row number			Double
	Stem cutting length			250
	Planting pitch adjustment		mm	500 / 600 700 / 800
	Planting depth	Rainy Season		100
		Dry Season	mm	130
	Planting angle			≤15°
	Ridge height / width			mm 300
Field Capacity	Fertilizer rate			kg/ha 25-50
	Number of operators			Driver + Feeders 1+2
	Fuel consumption			L/ha 8.1-10.6
Farming Applications	Working capacity			ha/day 3.2
	Cassava			